
LR1250

Ultra-modern, with a linear ribbon of flame over crushed black glass, creating striking contrast for contemporary spaces.

INBUILT HOLOGRAPHIC ELECTRIC FIREPLACE



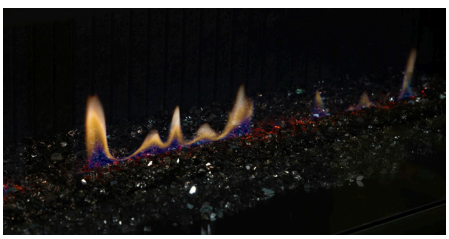

Uninterrupted Linear Flames

A continuous ribbon of holographic flame enhanced by reflective side panels and minimalist fireplace design, with a choice of four flame styles.



Installation Flexibility

No flues, vents, or consent required – giving you the freedom to install anywhere and integrate seamlessly into any space.



Surround Choice

Zero Clearance rated, there's no need for fire-rated materials – allowing you to choose any surround finish and place your TV as close as possible.

LR1250

FIRE BY escea.

SPECIFICATIONS

HEAT OUTPUT	1.5 or 3kW
POWER CONSUMPTION	3.45kW @15A 230V ~ 50Hz
OPERATION	Thermostatic Bluetooth© remote control
APPLIANCE WEIGHT	90kg
ELECTRICAL CONNECTION ACCESS POINT	Bottom RH side or Bottom RH back
CLEARANCE TO COMBUSTIBLES	Zero clearance from appliance surfaces
SERVICE ACCESS HATCH	Not Required
CAVITY WALL VENTING	Not Required
CERTIFICATION/COMPLIANCE	IEC 60335.1, IEC 60335.2.30 and RED
DATA BADGE	Inside appliance, upper left corner

DIMENSIONS

FIREPLACE SIZE	1312w x 545h x 439d mm
CAVITY OPENING	1332w x 555h x 450d mm
VIEWING AREA	1256w x 406h mm
TV CLEARANCE	100mm above viewing area


INSTALLATION

The LR1250 is an indoor holographic projection fireplace designed to be built into a false cavity - from standard building materials.


The appliance is to be installed prior to any wall linings or finishes.

For optimal viewing, the LR1250 base should be 300mm above the floor.

Wall linings or finishes can be of any thickness, and any standard building material may be used. If finishes extend beyond the 40mm viewing area trim depth, consider the visual impact of the material edge.

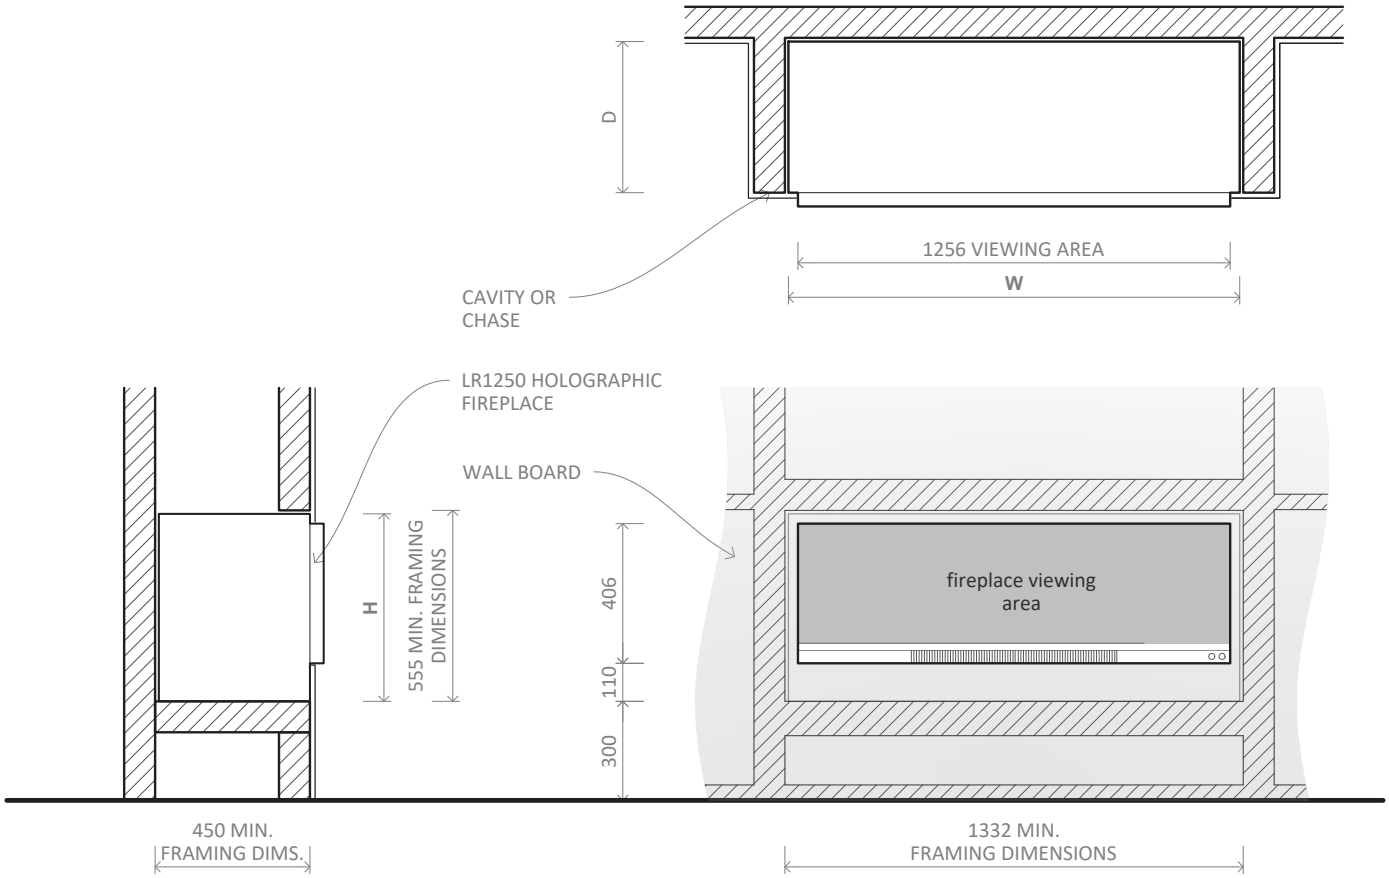

LR SERIES - ALL MODELS

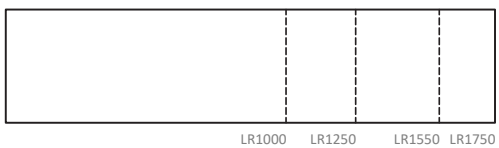

Further information and technical documents available via the QR code or escea.com/lr-series

Disclaimer: Product technical information are provided as a general guide and may not account for site-specific factors or installation constraints. All dimensions must be verified on-site before any manufacturing or installation. The manufacturer reserves the right to update specifications and product information without prior notice.